

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number  
**WO 2004/053035 A1**

(51) International Patent Classification<sup>7</sup>: C10M 175/00,  
175/02, C10G 31/10

(21) International Application Number:  
PCT/SE2003/001925

(22) International Filing Date:  
10 December 2003 (10.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0203699-4 12 December 2002 (12.12.2002) SE

(71) Applicant (for all designated States except US): ALFA  
LAVAL CORPORATE AB [SE/SE]; Box 73, S-221 00  
Lund (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): WASE, Claes [SE/SE];  
Grandalsvägen 10, S-146 38 Tullinge (SE).


(74) Agent: SVENSSON, Else-Marie; Alfa Laval Corporate  
AB, Hans Stahles väg, S-147 80 Tumba (SE).

(81) Designated States (national): AE, AG, AL, AM, AT (util-  
ity model), AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ,  
CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE  
(utility model), DE, DK (utility model), DK, DM, DZ, EC,  
EE (utility model), EE, EG, ES, FI (utility model), FI, GB,  
GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG,  
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,  
MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL,  
PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL,  
SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,  
YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: A METHOD OF PURIFYING CONTAMINATED OIL FROM PARTICLES SUSPENDED IN THE OIL IN A CENTRIFUGAL SEPARATOR

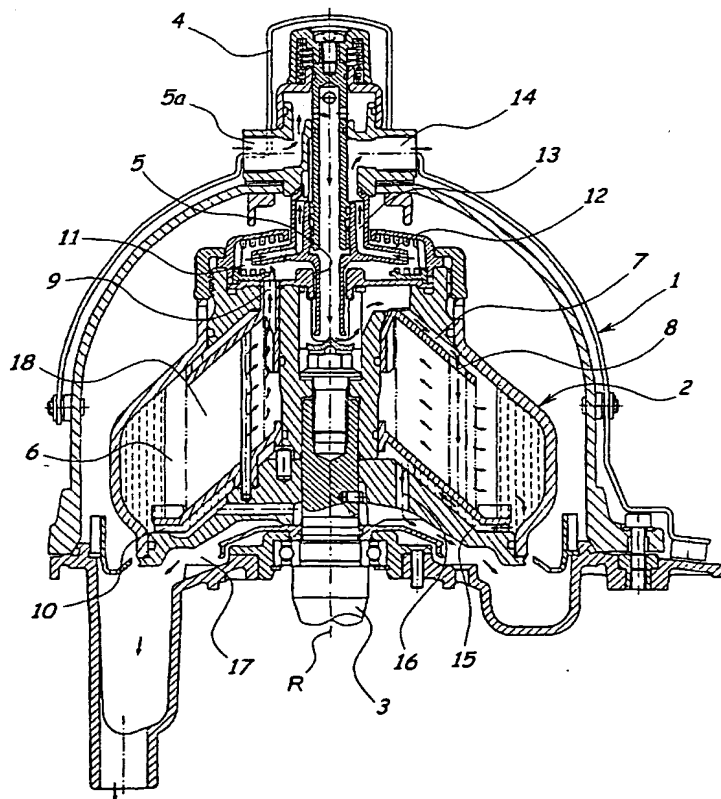

(57) Abstract: For purifying contaminated oil from particles suspended in the oil by means of a centrifugal separator a liquid separation aid is used having a density higher than that of the oil. The liquid separation aid attracts/binds the contaminating particles. The contaminated oil is supplied to a separation chamber of a rotating centrifugal rotor. Purified oil is discharged through a central light phase outlet of the separation chamber, and the liquid separation aid and the separated particles are discharged through a heavy phase outlet of the separation chamber, situated radially outside of said central light phase outlet. According to the invention the purification is carried through in such a way that a starting liquid, heavier than the oil and insoluble therein, is supplied to the separation chamber in an amount such that a layer of the starting liquid forms a liquid seal in the rotating centrifugal rotor, covering said heavy phase outlet. Only after this, contaminated oil and the liquid separation aid are supplied to the separation chamber. While purified oil leaves the separation chamber through said light phase outlet, at least part of the starting liquid and the liquid separation aid together with particles, separated from the oil, are discharged through the heavy phase outlet.



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,  
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,  
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

A method of purifying contaminated oil from particles suspended in the oil in a centrifugal separator

The present invention relates to a method of purifying contaminated oil from particles suspended in the oil by means of a liquid separation aid, which has a density larger than that of the oil. The separation aid is dispersed in the contaminated oil in order to make the particles more easily separable from the oil. The contaminated oil and the liquid separation aid are supplied into a separation chamber of a rotating centrifugal rotor. The liquid separation aid and the particles are separated from the oil by centrifugal force. The purified oil is discharged from the separation chamber through a central light phase outlet. The separated particles and the liquid separation aid are discharged from the separation chamber through a heavy phase outlet situated radially outside of the light phase outlet.

Mineral oils (also half- and full-synthetic) as well as animal oils and vegetable oils, with or without additives, are used widely in industry for various purposes, such as lubrication, cooling and insulation. During such use the oils commonly become contaminated by different kinds of particles. Depending on the composition and the particular use different methods for regeneration of contaminated oils are used.

Since long contaminated oils have been filtered in filter beds containing clay, bleaching earth or kieselguhr.

Purification of mineral oils from suspended particles is described for example in US 4 094 770. According to this patent the particles that are not filtrated away are removed by addition of an agglomerating aid in the form of a mixture of acetone and 2-butanone. The agglomerated particles

settle and may be removed from the oil. A finishing distillation step is necessary in order to purify the oil from the agglomerating aid.

US 4 491 515 describes purification of lubricating oil which has been  
5 used in vehicles. The oil, which may contain many kinds of contaminants, is purified by addition of a compound containing a carbonyl group (ketone) mixed with a water-containing electrolyte, for example an inorganic or organic acid. When this acid has been added to the oil, there is relatively rapidly obtained an agglomeration of particulate contaminants that may  
10 be removed by settling or centrifugation. The ketone is recovered in a distillation step.

US 4 519 899 describes purification of rolling oil which has been contaminated with particles of the material which has been treated at the rolling  
15 operation. A coagulating agent, as for example a water-containing soda solution, is mixed with the oil in a carefully controlled amount. The particles coagulate and are found in the water phase, which may be removed by settling or in a centrifugal separator.

20 In SE 512 750 there is described a method for gravimetric separation of an oil which is contaminated with particles and/or water. According to this method a collection polymer or polymer mixture, which is not soluble in oil, is added to the contaminated oil and mixed with the same, after which separation of the oil and the collection polymer occurs. The collection polymer and the main part of the contaminants form a bottom phase, while  
25 the oil forms a top phase. The bottom phase with the collection polymer and the contaminants is removed. According to this publication the separation may take place by centrifugation.

The contaminants in the shape of particles, which are to be removed from the oil, may in many cases be very small and difficult to remove from the oil. The amount of particles may also be small. The amount of separating aid that must be added may therefore be comparatively small. To separate two liquid phases of different density from each other in a centrifugal separator may cause problem if one of the phases is present only in a small amount.

The present invention offers a solution to this problem.

According to the invention, in use of a method as initially defined, the separation chamber of the centrifugal rotor is pre-charged with a starting liquid, which is heavier than the oil and insoluble therein, in an amount such that a layer of the starting liquid forms a liquid seal in the centrifugal rotor, covering said heavy phase outlet. Only after such pre-charging of the separation chamber the contaminated oil and the liquid separation aid are supplied to the separation chamber, at least part of the starting liquid together with liquid separation aid and particles, separated from the oil, being discharged from the separation chamber through said heavy phase outlet.

The invention may with advantage be carried through in such a manner that an amount of the liquid separation aid is used as said starting liquid. In this way only one kind of auxiliary liquid has to be used. On the other hand it may be suitable to use a starting liquid of a different kind to form the liquid seal in order to restrict the amount of liquid separation aid needed. Such a different kind of starting liquid may be water, for instance.

Among the oils, which may be cleaned by the proposed method, there can be mentioned oils used for insulation purpose in transformers and tap changers, rolling oils, hydraulic oils and lubricating oils.

- 5 The choice of the liquid separating aid depends on the oil, which is to be purified. The oils mentioned above may be pure mineral oils, half- or full-synthetic oils, or animal or vegetable oils with or without additives giving the oils their desired properties. The choice of separating aid is also dependent on the kind of contaminating particles, which are to be removed
- 10 from the oil. As may be understood from the prior art mentioned above different combinations of separating aids are available. The liquid separation aid may or may not contain water or be soluble in water. The used separation aid should however be insoluble in oil. Depending on the amount of contaminated particles a larger or smaller amount of separating aid is added.
- 15

The separating aid may contain substances causing flocculation of the particles, which gives heavier particles more easily removable by centrifugal separation. The separating aid may also attract or bind the particles

20 by way of chemical or surface chemical bonds.

By filling a radially outer space in the aforementioned rotor with said starting liquid, e.g. liquid separation aid, before oil purification is started, an efficient purification can be obtained immediately. If, instead, contaminated oil mixed with liquid separation aid had been supplied to the

25 rotating rotor from the start, a considerable amount of oil would be discharged through the separation chamber outlet for heavy phase, before a liquid seal covering this outlet had been formed in the rotor by liquid separation aid separated from the contaminated oil.

When the centrifugal rotor contains separation discs improving the separation, an interface level between oil and separation aid is maintained, in a steady state process, in the vicinity of the outer edges of the separation discs.

5

According to the invention a continuous addition of liquid separation aid takes place together with the oil. The liquid separation aid and the oil may, if so is considered suitable, be mixed in some kind of mixer connected to the inlet of the centrifugal separator or in a separate mixing operation prior to the purification. In the last mentioned case a desired holding time for the mixture of oil and liquid separating aid may be obtained prior to the purification.

The method according to the invention may advantageously be used for purification of mineral or synthetic oils containing additives in order to give the oil the desired properties for the intended application, at which the density of the oils lie in the interval of 0,85 – 1,05 g/cm<sup>3</sup> at 40 °C.

The method of the invention may with advantage be used for mineral oils, which have been contaminated with very small particles, for example very small soot particles or metal particles which are floating in the oil and therefore do not settle. Mineral oils have usually a density of 0,85 – 0,90 g/cm<sup>3</sup> at 40 °C. Earlier the only possibility to purify oil containing this kind of contaminants have been to use kieselguhr or bleaching clay filters, which filter materials are expensive and create problems in connection with deposition of the used filter beds.

If the mineral oil has been used as an insulating agent in a transformer or tap changer and is free from additives apart from a necessary oxidation inhibitor, the separation aid with advantage may be a liquid polymer,

which binds the small soot particles that are present in the oil. Also rolling oil as well as chlorine-paraffin oil contaminated with very small metal particles may be cleaned in this way.

- 5 The oil to be purified may also be lubricating oil for Diesel engines, contaminated with small dispersed particles, the separation aid being a liquid polymer.

One example of a suitable liquid polymer for purification of these kinds of  
10 oils is a polyhydroxy alkoxylate with a density of 1,0 – 1,1 g/cm<sup>3</sup> at 40 °C.

#### Example 1

A mineral oil that has been used as an insulating agent in a tap changer and is contaminated with soot particles should be purified from the same.

- 15 The amount of oil in the tap changer may be 200 – 1500 litres. For the purification there is used a mobile centrifugal separator MIB303S-13 from Alfa Laval AB. Depending on the time interval between consecutive purification operations the oil contains 1 – 10% soot. The rotor of the centrifugal separator is started and is brought to rotate at full speed. Separation  
20 aid in the form of a liquid polymer is added to the rotor in an amount of 0,7 l. The polymer is forced to flow to the outer part of the separation chamber of the rotor by centrifugal force, where it forms a liquid layer rotating with the rotor and covers a heavy phase outlet of the separation chamber. The amount of polymer that is needed to form the liquid layer  
25 depends on the size and construction of the centrifugal separator. When the layer has been formed the oil that is to be purified is supplied, oil having then already been mixed with polymer. The amount of polymer in the supplied mixture is around 4 %. The polymer that is used for the purification consists of a polyhydroxy alkoxylate.



### Example 2

Rolling oil consisting of a chlorine-paraffin oil shall be purified by the method according to the invention. The oil, which may contain 1-17 % sludge, is mixed with liquid polymer, a polyhydroxy alkoxylate. A mobile  
5 centrifugal separator of the same kind as used in example 1 is used for the purification. Polymer is added to the centrifugal separator when the separator has been started to form the rotating liquid layer. The amount of oil that is to be purified may be between 3 – 15 m<sup>3</sup>. Previously, contaminated oil had to be deposited at extremely high costs. Purification ac-  
10 cording to the technology now suggested, therefore, has important advantages.

### Example 3

Lubricating oil used for lubrication of Diesel engines shall be purified ac-  
15 cording to the invention. The oil contains a number of additives in order to give the oil the desired properties.

The oil is contaminated with 0,1 to 5 % of particles mainly consisting of soot, combustion rests and reaction products from some of the additives  
20 of the oil. The main part of the contaminants is present as colloidal or sub micron particles, which are impossible to remove in centrifugal separators or filters.

50 litres of the contaminated lubricating oil is mixed by stirring with about  
25 4 % liquid polymers, a polyhydroxy alkoxylate. The mixture is heated to a temperature of 95 °C. In order to separate the polymer entraining the contaminants use is made of a centrifugal rotor of the same kind as in example 1, which is pre-charged with a polymer layer before the oil/polymer mixture is supplied into it.

The result of the extraction was measured by analysis of the oil prior to and after the purification in respect of insoluble matter in n-pentan (ASTM D 893-892).

- 5    The amount of contaminants in the oil had decreased by 82 %, from 0,96 % to 0,18 % insoluble matter.

The method according to the invention is further described below with reference to the attached drawing, which shows a centrifugal separator  
10    suitable for carrying through the method of the invention.

The centrifugal separator shown in the drawing has a stationary housing 1, in which there is arranged a centrifugal rotor 2 rotatable about a vertical centre axis R. The rotor 2 is mounted on top of a vertical driving shaft  
15    3 coupled to a driving device (not shown). A connection device 4 carried by the housing 1 includes, among other things, a vertical inlet pipe 5 extending from above into the rotor 2 and forming an inlet channel that opens into a central inlet space in the rotor. Said inlet channel communicates at its upper end with an inlet 5a of the connection device 4.

20

The rotor 2 forms a separation chamber 6 and several inlet passages 7 leading from said central inlet space in the rotor to respective inlets 8 of the separation chamber 6. The rotor 2 also forms a central light phase outlet 9 of the separation chamber 6 at a relatively small distance from  
25    the centre axis R and, at a greater distance from the centre axis R, a number of heavy phase outlets 10 of the separation chamber 6.

The light phase outlet 9 is in the form of an overflow outlet leading to an outlet chamber 11 in the upper part of the rotor 6. In this outlet chamber  
30    11 there is arranged a paring disc 12, which is supported by the connec-

tion device 4 and has at least one paring channel 13 communicating with an outlet 14 of the connection device.

5 The heavy phase outlets 10 of the separation chamber communicate through channels 15 with an overflow outlet 16 of the rotor, opening to a space 17 in the housing 1 below the rotor 2.

10 Within the separation chamber 6 there is a stack of conical separation discs 18, which are arranged coaxially with the centre axis R and delimit between themselves thin passages for through flow of liquid under treatment in the rotor.

15 The centrifugal separator in the drawing operates in the following manner when used for cleaning oil from small particles suspended therein by means of a separation aid in liquid form, e.g. a liquid polymer. The separation aid is insoluble in the oil to be cleaned and has a density larger than that of the oil.

20 Either before or after the rotor has been brought in rotation about the centre axis R, a certain amount of separation aid, or another starting liquid heavier than the oil to be cleaned, is supplied through the rotor inlet into the separation chamber 6. This starting liquid forms, when the rotor is rotating, a liquid layer in the radially outermost part of the separation chamber, covering the heavy phase outlets 10 thereof.

25 After the separation chamber 6 has been pre-charged with said amount of a starting liquid, a mixture of oil to be cleaned and said liquid separation aid is supplied into the separation chamber at any predetermined rate, preferably continuously. The mixture enters the separation chamber 30 through its inlets 8 and flows axially through aligned distribution holes in

the separation discs 18 into the various interspaces between the discs. In these interspaces, or flow paths, the oil part of the mixture flows inwardly towards the centre axis R, whereas the dispersed separation aid, together with particles contaminating the oil, moves outwardly away from the  
5 centre axis R.

Oil having been freed from particles and separation aid leaves the separation chamber 6 through its central light phase outlet 9 and flows further on, via the outlet chamber 11 and through the paring disc 12, out through  
10 the outlet 14 of the connection device 4. The dispersed separation aid and the particles move out into the aforementioned layer of starting liquid, which may also be liquid separation aid. From the outer part of the separation chamber 6 at least part of the starting liquid, together with separation aid and particles, separated from the oil, leave the separation chamber  
15 through its heavy phase outlets 10 and flow further on, via the outlet channels 15, to and out through the overflow outlet 16 of the rotor 2 to the space 17 below the rotor.

At the time when said starting liquid has been supplied into the separation  
20 chamber 6, but before any oil to be cleaned has been supplied, the layer of starting liquid forms an inner cylindrical liquid surface at a first radial level in the separation chamber. Then, when oil to be cleaned is supplied, the cylindrical surface of the starting liquid is displaced radially outwardly to a second level. This second level should be situated radially inwardly  
25 of the heavy phase outlets 10. Thus, the amount of starting liquid to be supplied must be accurately determined, so that this liquid can form a liquid seal in the rotor during the initial part of the separation process, preventing escape of oil through the outlets 10.

In a steady state separation process there is always an interface layer formed between oil and separation aid having been separated from the oil, said interface layer being maintained at a level radially inside of the heavy phase outlets 10.

5

The centrifugal rotor 2 in the drawing has a solid wall surrounding the separation chamber 6. However, it may be desirable sometimes to use, instead, a rotor having peripheral sludge outlets adapted to be intermittently openable during operation of the rotor, so that particles separated from the oil but not entrained by the liquid separation aid leaving through the heavy phase outlets 10 can be intermittently discharged during operation of the rotor.

Claims

1. A method of purifying contaminated oil from particles suspended there  
in by means of a liquid separation aid having a density larger than that of  
5 the oil and being dispersed in the contaminated oil in order to make the  
particles more easily separable from the oil, the method comprising

- supplying said contaminated oil and said liquid separation aid into a se-  
paration chamber of a rotating centrifugal rotor,

10

- separating in said separation chamber the particles and the liquid sepa-  
ration aid from the oil by centrifugal force,

- discharging purified oil from the separation chamber through a central  
15 light phase outlet thereof and

- discharging separated particles together with separated liquid separa-  
tion aid from the separation chamber through a heavy phase outlet of the  
separation chamber, situated radially outside said central light phase  
20 outlet,

characterized by

- pre-charging the separation chamber, before supplying a substantial  
25 amount of contaminated oil thereinto, with a starting liquid, which is  
heavier than the oil and insoluble therein, in an amount such that a layer  
of the starting liquid forms a liquid seal in the centrifugal rotor, covering  
said heavy phase outlet,

- supplying thereafter said contaminated oil and said liquid separation aid into the separation chamber, and

- discharging from the separation chamber through said heavy phase outlet at least part of said starting liquid and particles together with liquid separation aid, separated from the oil.

2. A method according to claim 1, characterized by using as said starting liquid an amount of said liquid separation aid.

3. A method according to claim 1, characterized in that the oil is a mineral or synthetic oil containing additives giving the oil desired properties for its intended use, the density of the oil being in the interval 0,85 – 1,05 g/cm<sup>3</sup> at 40°C.

4. A method according to claim 3, characterized in that the oil is a pure mineral oil having a density of 0,85 - 0,90 g/cm<sup>3</sup> at 40 °C.

5. A method according to claim 4, characterized in that the mineral oil is one that has been used as an insulating agent in a transformer or tap changer, is free from additives, apart from necessary oxidation inhibitor, and is contaminated with very small soot particles, the separation aid being a liquid polymer.

6. A method according to claim 3, characterized in that the oil is one that has been used as a lubrication oil for Diesel engines and is contaminated with small dispersed particles, the separation aid being a liquid polymer.

7. A method according to claim 5 or 6, characterized in that the polymer is a polyhydroxy alkoxylate having a density of 1,0-1,1 g/cm<sup>3</sup> at 40 °C.



1/1

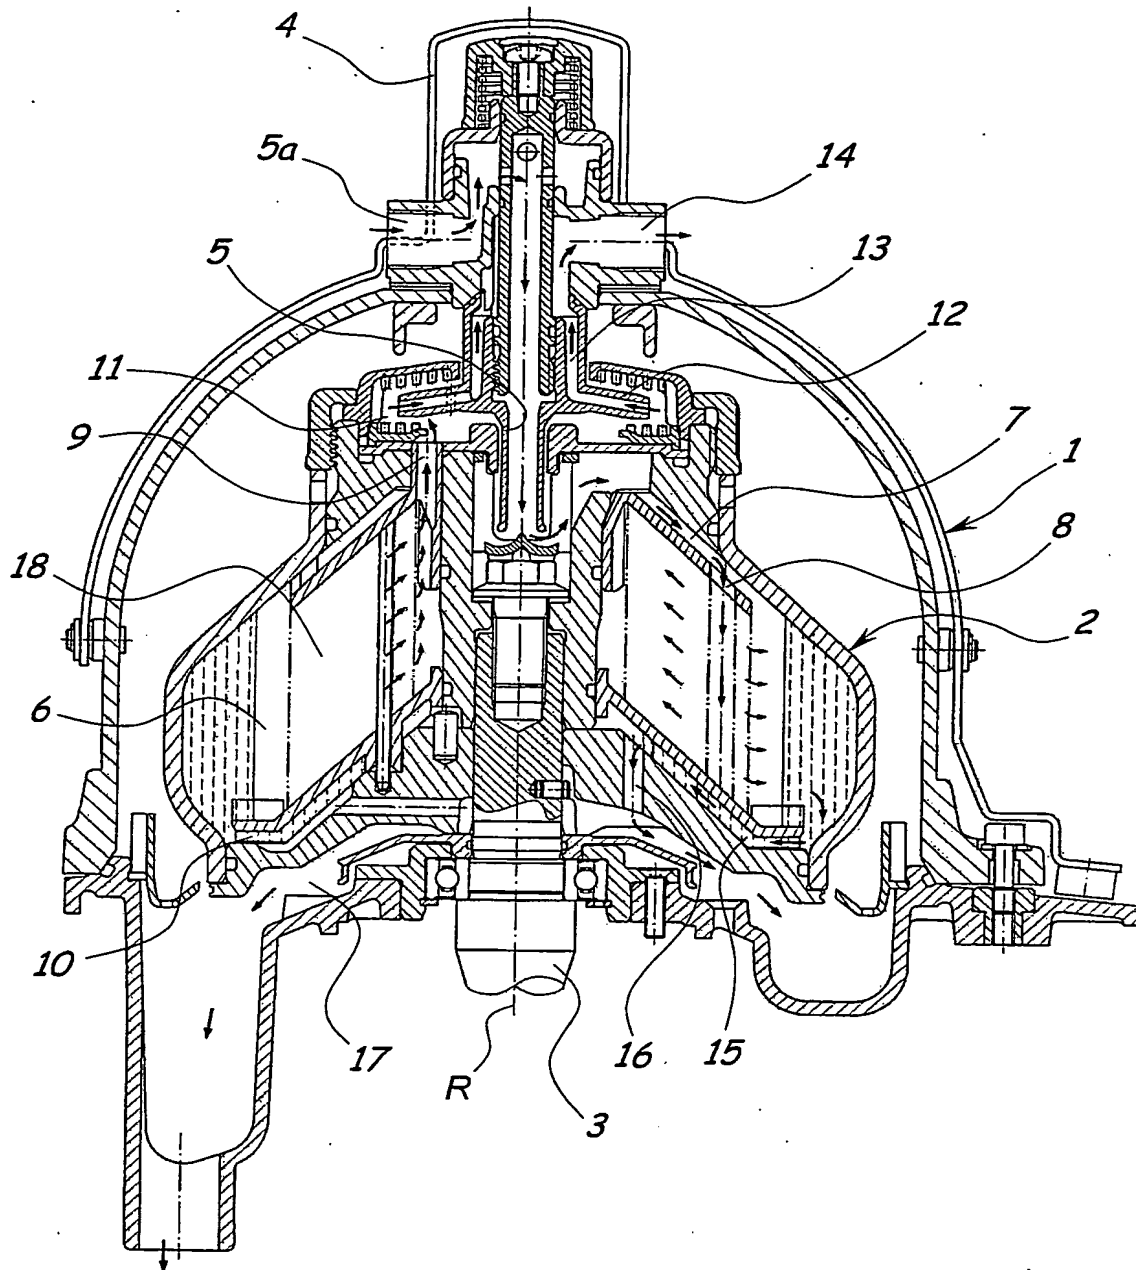


Fig. 1

JC20 Rec'd PCT/PTO 10 JUN 2005

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2003/001925

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: C10M 175/00, C10M 175/02, C10G 31/10

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: C10M, C10G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9514752 A1 (KEMISK SEPARERING TUMBA AKTIEBOLAG), 1 June 1995 (01.06.1995), whole document  --	1-7
A	US 4710159 A (PER GULLERS), 1 December 1987 (01.12.1987), whole document  --	1-7
A	US 4820256 A (TORBJÖRN NORDSTRÖM), 11 April 1989 (11.04.1989), whole document  -- -----	1-7

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

10 March 2004

Date of mailing of the international search report

11-03-2004

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Malin Söderman/MP  
Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

Information on patent family members

27/02/2004

International application No.

PCT/SE 2003/001925

WO	9514752	A1	01/06/1995	AT	236241	T	15/04/2003
				AU	1207295	A	13/06/1995
				CA	2176930	A,C	01/06/1995
				DE	69432432	D,T	29/01/2004
				EP	0731830	A,B	18/09/1996
				SE	0731830	T3	
				ES	2196052	T	16/12/2003
				JP	9505622	T	03/06/1997
				SE	512750	C	08/05/2000
				SE	9303961	A	30/05/1995
				US	5976357	A	02/11/1999
<hr/>							
US	4710159	A	01/12/1987	DE	3567588	D	00/00/0000
				EP	0197063	A,B	15/10/1986
				SE	0197063	T3	
				JP	62500365	T	19/02/1987
				SE	8405015	D	00/00/0000
				WO	8602021	A	10/04/1986
<hr/>							
US	4820256	A	11/04/1989	BR	8602518	A	27/01/1987
				DE	3666920	D	00/00/0000
				EP	0205246	A,B	17/12/1986
				JP	1985560	C	25/10/1995
				JP	7016629	B	01/03/1995
				JP	61283364	A	13/12/1986
				SE	448150	B,C	26/01/1987
				SE	8502830	D	00/00/0000